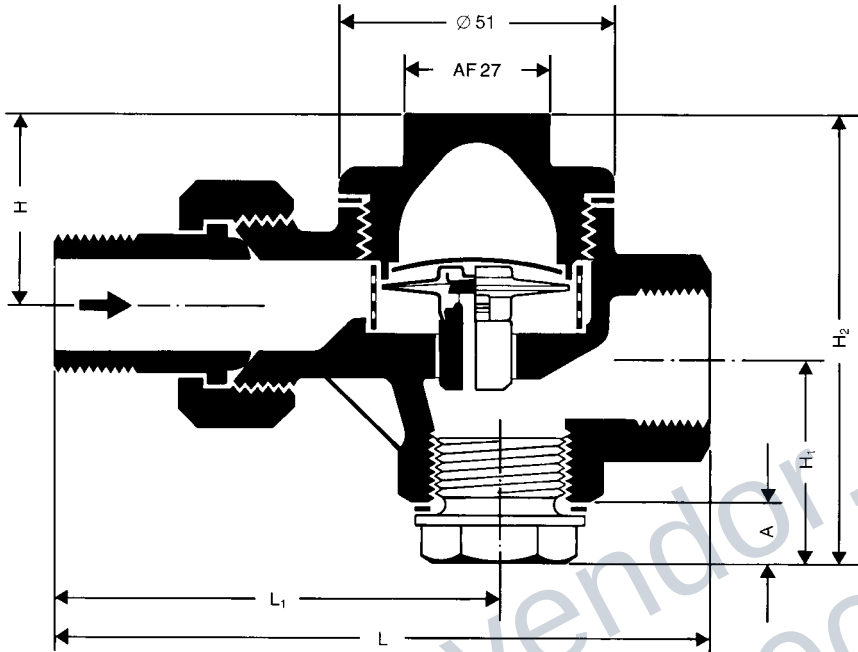


Steam Trap
MK 20
PN 6


Thermostatic steam trap particularly suited for steam heating plants and other low-pressure steam installations. Opening and closing are controlled by the membrane regulator as a function of the temperature and the pressure in the trap.

The trap adapts itself automatically to all operating conditions within its range. When opening it immediately releases a large cross-sectional flow area, so that large amounts of hot condensate can be discharged. The operation of the trap is neither influenced by varying upstream pressure nor by back pressure. The trap vents automatically during start-up and in continuous operation.

The thermostatic capsule of the membrane regulator is a control unit with very small dimensions which immediately reacts to any change in temperature. It resists corrosion and is easy and quick to replace owing to its press-stud fixing in the body.

Installation in any position.

Pressure/Temperature Rating

Max. service pressure	barg	4.5	3.6
	psig	65	52
Related temperature	°C	250	300
	°F	482	572
Max. differential pressure (inlet pressure minus outlet pressure)		4.5 bar (65 psi)	

Materials
DIN

Body	Malleable cast iron GTW-40 (0.8040)	
Thermo-static capsule	Mem-brane	Hastelloy®
	Capsule	Stainless steel
Other internals	Stainless steel	

Design

Straight-through or angle valve. Only two main units: body and thermostatic capsule with Hastelloy® membrane. Capsule housing with press-stud fixing for easy removal. Large-surface, cylindrical strainer.

Standard design with undercooling capsule "5 U 2".

Connections

Inlet screwed male with union nut and screwed nipple, outlet screwed female. Threaded connections: 1/2" and 3/4" BSP.

Dimensions and Weights

DN	mm in	15 1/2	20 3/4
Dimensions in mm	L	120	125
	L ₁	80	85
	A	14	16.5
	H	33	37
	H ₁	39	44.5
	H ₂	82	92
Plug AF (mm)		19	24
Union nut AF (mm)		32	38
Approx. weight	kg	0.8	0.9

Capacity Chart

The diagram shows the maximum capacities for hot and cold condensate.

The capacities are dependent on the differential pressure (working pressure). The differential pressure is the difference between inlet and outlet pressures and depends among other things on the run of the pipeline. If the condensate downstream of the trap is lifted, the differential pressure (working pressure) is reduced by approximately 1 bar for 7 m (or 2 psi for 3 feet) in lift.

Curve 1

Indicates the trap's maximum capacity discharging of hot condensate (during operation).

Example:


Working pressure (differential pressure) 3 bar. Maximum capacity without any noticeable banking-up 1000 kg/h.

Curve 2

Indicates the traps' maximum capacity discharging of cold condensate (during start-up).

Example:

Working pressure 3 bar. Maximum capacity at start-up of plant 1700 kg/h (cold condensate).

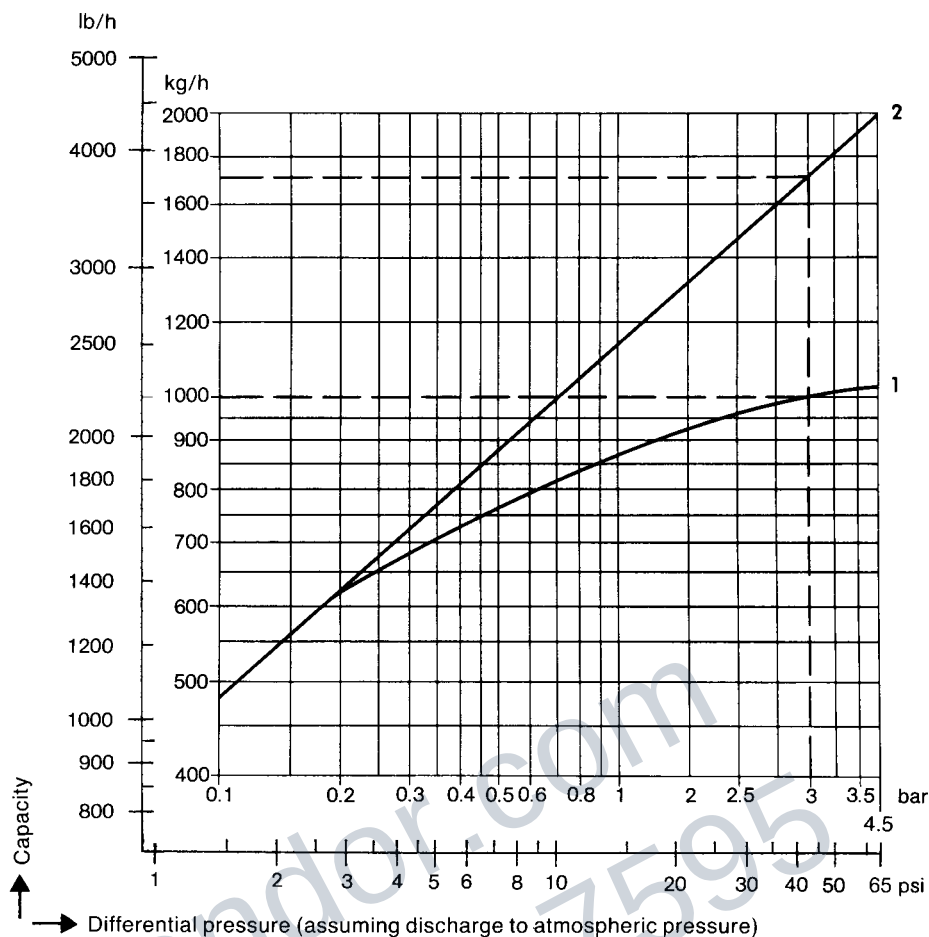


Spare Parts

Item No.	Designation	Part No.
1 b	Thermostatic capsule 5U2	099 510
1 a	Thermostatic capsule 5N2	099 509
5	Cap gasket	013 941
3	Strainer	095 076
6	Plug gasket 1/2" (20 x 26 mm) 3/4" (26 x 32 mm)	014 051 014 052

When ordering please state:

Steam pressure, back pressure, quantity of condensate to be discharged, nominal size (DN), position of the trap and details of application.

Supply in accordance with our general terms of business.

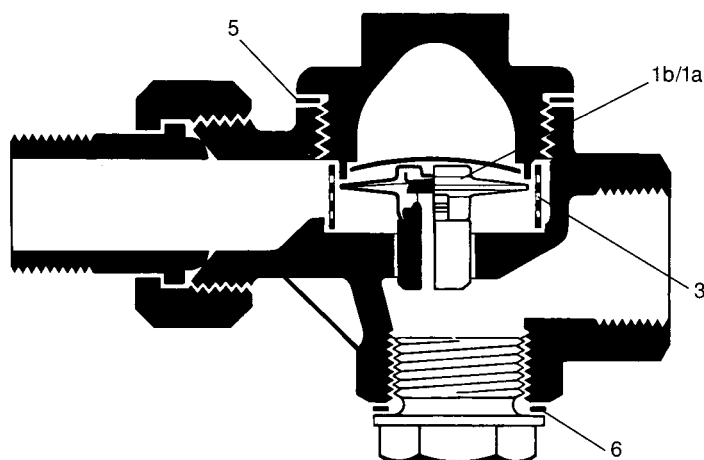

GESTRA AG

Münchener Straße 77, 28215 Bremen, Germany
Telefon +49 421 3503-0, Telefax +49 421 3503-393
E-mail info@de.gestra.com, Web www.gestra.de

